

For All ProBuilder 36 Clean Face Models



(D)

CoolSmart
Heat Vent

(C)

TV

11-1/2" Minimum

(B)

Heated
Convection
Air

(A)

Cool Room
Air

CoolSmart TV Wall™ (Optional)

- (A)** Cool room air is naturally pulled into the bottom of the convection chamber surrounding the firebox.
- (B)** If the convection fan is turned on, a major portion of the heated air is returned to the room above the fireviewing glass.
- (C)** The CoolSmart TV Wall™ allows a TV to be safely installed above the fireplace (minimum distance above fireplace of 11-1/2").
- (D)** If the fan is turned off, cool room air **(A)** and the majority of the heated convection air **(B)** are naturally drawn up through the CoolSmart Heat Vent **(D)** and returned to the room above the TV.




TRAVIS INDUSTRIES
HOUSE OF FIRE

PB 36 CoolSmart TV Wall Kit TM

(sku# 98900778)


PB 36 CF Installation Requirements

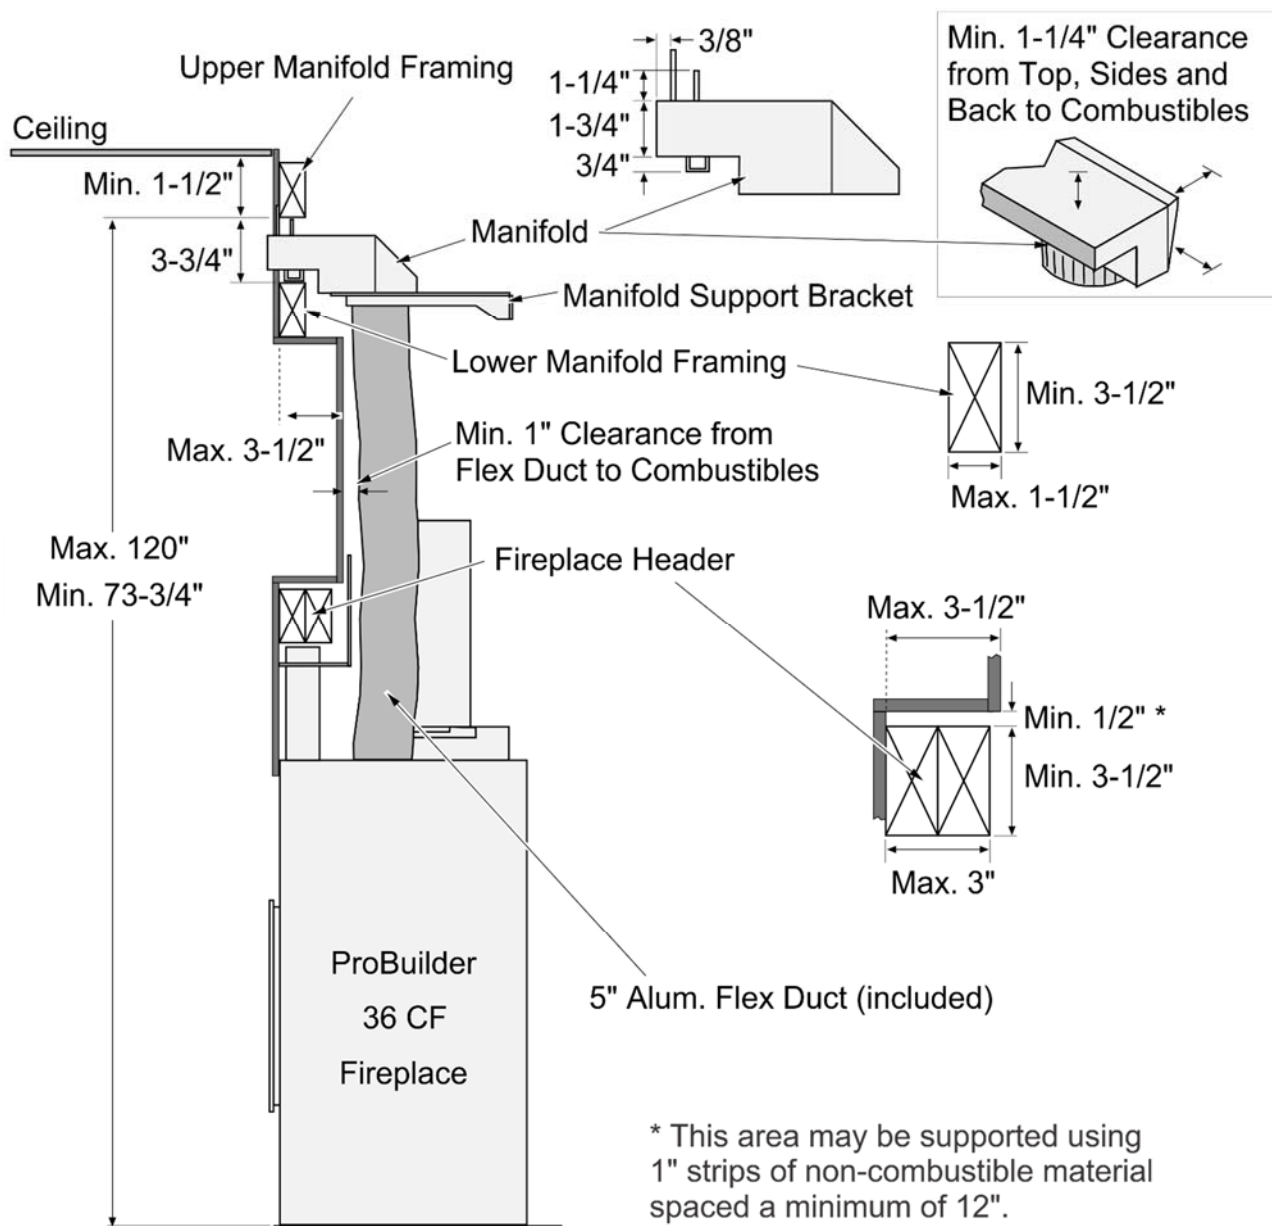

Grill and Manifold Dimensions

The grill may be installed over the facing to provide an aesthetic opening for the convection outlet. (2) 8-32 x 1-1/2" screws attach the trim to the upper manifold. This allows variable thickness of finish material.

Dimensions

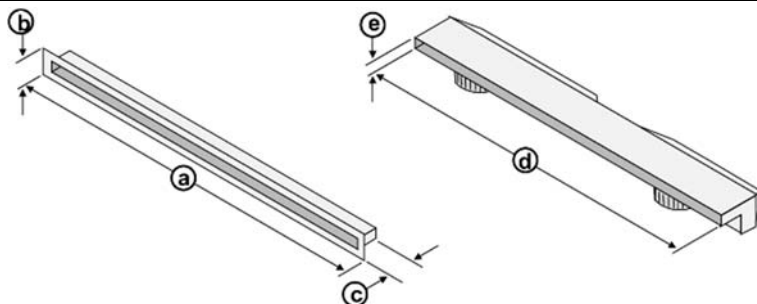

a	b	c	d	e
35-7/8"	2-7/8"	1-1/4"	34-7/8"	1-3/4"